


HQL 4Y

High intensity discharge lamps




- Squares, residential areas, parks, main roads and trunk roads
- Car parks and industrial sites
- Hall and effect lighting
- Decorative plant lighting



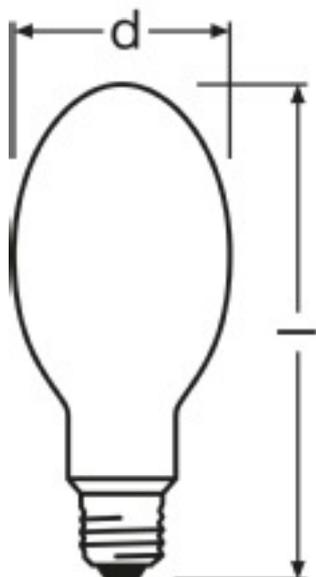

Product line drawing with letters
HQL 50 W 4Y E27 | HQL 80 W 4Y E27 | HQL 125 W 4Y E27

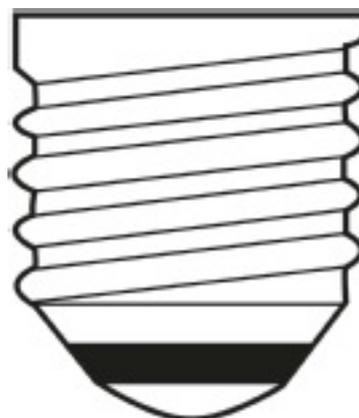

E27
IEC 7004-21

Base
HQL 50 W 4Y E27 | HQL 80 W 4Y E27 | HQL 125 W 4Y E27



E 27

Base
HQL 50 W 4Y E27 | HQL 80 W 4Y E27 | HQL 125 W 4Y E27

Technical data

Product description	Nominal wattage	Nominal luminous flux	Base (standard designation)	Diameter	Length
HQL 50 W 4Y E27	50 W	2000 lm	E27	56.0 mm	130.0 mm
HQL 80 W 4Y E27	80 W	4000 lm	E27	71.0 mm	155.0 mm
HQL 125 W 4Y E27	125 W	6800 lm	E27	76.0 mm	168.0 mm

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.